


Tracks (T)

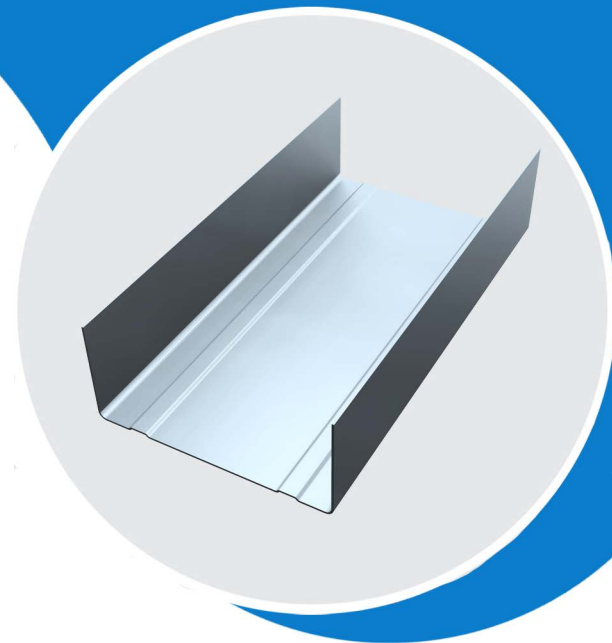

MATERIAL	
Web (in)	3½
Flange (in)	1¼
Yield Strength Fy (KSI)	33
Tensile Strength Fu (KSI)	45
Design Thickness (in)	0.0346
Minimum Thickness (mil)	33
Gauge	20S
Available Finish G60, G90	

GROSS SECTION PROPERTIES	
Weight of Member: (lb/ft)	0.71
Cross Sectional Area: A (in ²)	0.207
Moment of Inertia: Ix (in ⁴)	0.405
Section Modulus: Sx (in ³)	0.222
Radius of Gyration: Rx (in)	1.397
Moment of Inertia: Iy (in ⁴)	0.030
Radius of Gyration: Ry (in)	0.379

EFFECTIVE SECTION PROPERTIES	
Moment of Inertia-Deflection: Ixe (in ⁴)	0.355
Section Modulus: Sxe (in ³)	0.166
Allowable Bending Moment: Ma (in-k)	3.27
Allowable Shear Force: Va (lb)	1024
(check web crippling)	


TORSIONAL SECTION PROPERTIES	
St. Venant Torsional Constant: Jx1000 (in ⁴)	0.083
Torsional Warping Constant: Cw (in ⁶)	0.070
Shear Center to Centroid on Principal X-axis: Xo (in)	-0.668
Radius of Gyration on the Centroid Principal axis: Ro (in)	1.594

PRODUCT ID

350T 125-33 (3½x1¼x20Sga) Grade 33

CODES & STANDARDS

- ASTM A 1003, A 653, & C 955
- AISI S100-16

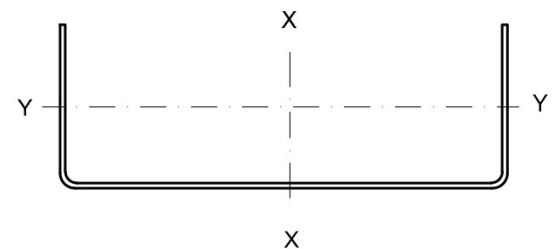

See Hermes/Hephaistos Technical Manual
for complete design data